FOURMOST Technology Innovation Inc.

GAMMA BOTTOM HARNESS CBG COMPATIBLE

■GENERAL DESCRIPTION

With the ever increasing demand for high temperature survivability components, Fourmost has designed a family of standard Measurement While Drilling (MWD) harsh environment harnesses. All components in the harnesses are OEM rated to a minimum of 200°C (392°F) to ensure survivability in today's harshest drilling environments. The Gamma Bottom Harness is fully compatible with gamma modules that have CBG or compatible units installed.

■FEATURES

- Assembled entirely with components OEM rated to 200°C (392°F).
- Every Kintec connector is tested to 20,000 PSI.
- Protective sheathing adds an extra layer of durability to the harness.
- Clear potting allows for visual inspection of wire solder joints.
- Added cable support eliminates flexing near pinch points during assembly.

■DIMENSIONS [inches]

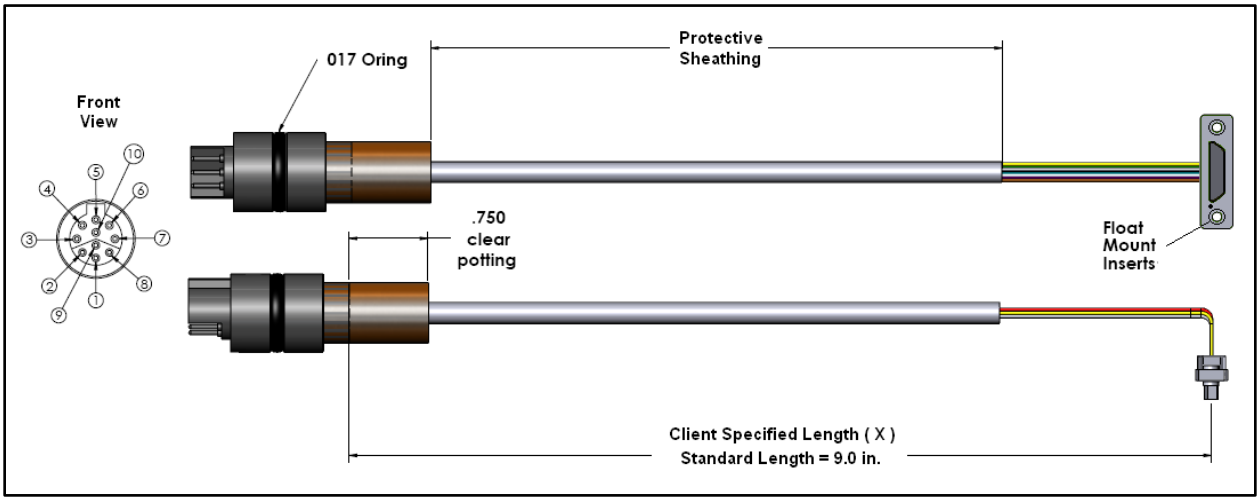

■ORDERING INFORMATION

700 – 00004 – 0□/□□□

Operating Temperature Range:
1 - -45°C to +200°C
2 - -45°C to +175°C

Length (X) in inches.
Format YY.Y inches.
Standard = 090 = 9 in.

CALL US WITH YOUR CUSTOM HARNESS REQUIREMENTS AT 403-705-0460
OR EMAIL US AT INFO@4MOST-TECHNOLOGY.COM

#303, 3750 46th Avenue SE
Calgary, AB T2B 0L1
Ph: 403.705.0460
Fax: 403.272.0457

Revised September 2009